

# LPPF Series PP Cartridge Filter

*Provide higher throughput and better removal efficiency in pharmaceutical applications*

LPPF series PP cartridge filters are optimized for a wide range of prefiltration applications enabling efficient removal of particulates and colloidal contaminants. Optimized form factor with progressively polypropylene (PP) materials provides higher particle removal efficiency and better throughput in pharmaceutical applications.

**Note:** These filters are not available for North America and Europe. Please reach out to our specialists for other product recommendation for your applications.



*Higher throughput for demanding liquid applications*

## APPLICATIONS

- Prefiltration for LVP/SVP production
- Particle removal for API production
- Clarification for vaccines

## FEATURES & BENEFITS


<b>All components meet USP&lt;87&gt;&lt;88&gt;, 21 CFR and commission regulation for food contact materials</b>	Provides biosafety insurance and global regulatory compliance
<b>Optimized form factor with progressively polypropylene (PP) materials</b>	Better throughput and higher particle removal efficiency in demanding liquid applications
<b>All polypropylene construction</b>	Provides excellent chemical compatibility, allowing use in a broad range of applications

## SPECIFICATIONS

<b>Materials of construction</b>	Media	Polypropylene
	Support	Polypropylene
	Core and Cage	Polypropylene
	End Caps	Polypropylene or Polypropylene with stainless steel (SS) lining
	O-rings/Gasket	Silicone/EPDM (Other material on request)
	Sealing technology	Thermal bonding, no adhesives
<b>Dimensions</b>	Diameter	Ø68 mm
	Length	5", 10", 20", 30", 40"
<b>Filtration area</b>	≥2.1 – 3.2 ft <sup>2</sup> per 10" cartridge	
<b>Retention rating</b>	0.22, 0.45, 1.0, 5.0, 10 µm	
<b>Maximum differential pressure</b>	Forward: 4.2 bar @ 25°C (77°F), 2.0 bar @ 60°C (140°F)	
<b>Multiple sterilization cycles</b>	May be autoclaved for maximum 20 cycles at 127°C (261°F), 30 min	
	May be sanitized by hot water, maximum 30 cycles at 85°C (185°F)	
<b>Food contact material</b>	All components meet the requirements of (EC) No 1935/2004	
<b>Indirect food additive</b>	All components meet the FDA Indirect Food Additive requirements cited in 21 CFR 177-182	
<b>Quality</b>	Manufactured in accordance with ISO 9001 and ISO 13485 certified quality management system	

## ORDERING INFORMATION

LPPF Series PP Cartridge Filter: part number

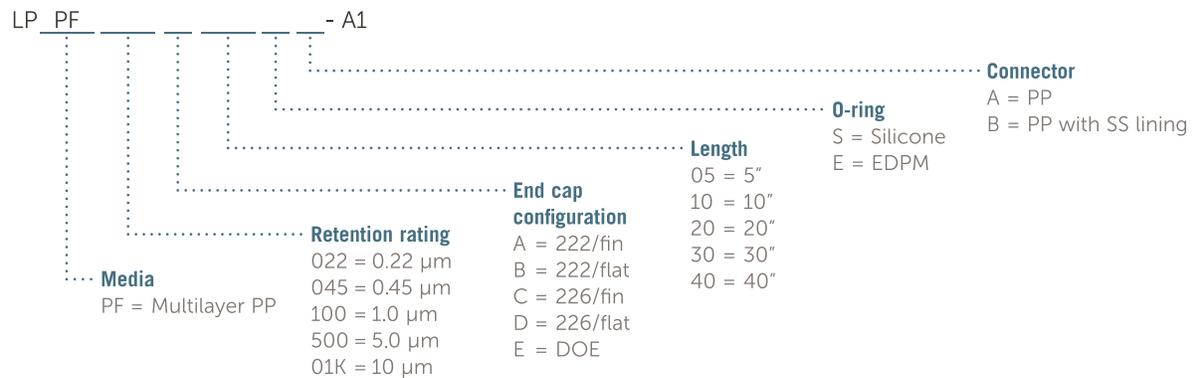

#### FOR MORE INFORMATION

Please call your Regional Customer Service Center today to learn what Entegris can do for you. Visit [entegris.com](https://www.entegris.com) and select the [Contact Us](#) link to find the customer service center nearest you.

#### TERMS AND CONDITIONS OF SALE

All purchases are subject to Entegris' Terms and Conditions of Sale. To view and print this information, visit [entegris.com](https://www.entegris.com) and select the [Terms & Conditions](#) link in the footer.



Corporate Headquarters  
129 Concord  
Billerica, MA 01821  
USA

Customer Service  
Tel +1 952 556 4181  
Fax +1 952 556 8022  
Toll Free 800 394 4083

Entegris®, the Entegris Rings Design®, and other product names are trademarks of Entegris, Inc. as listed on [entegris.com/trademarks](https://www.entegris.com/trademarks). All third-party product names, logos, and company names are trademarks or registered trademarks of their respective owners. Use of them does not imply any affiliation, sponsorship, or endorsement by the trademark owner.

©2023-2025 Entegris, Inc. | All rights reserved. | Printed in the USA | 4463-13096DSA-0225