

# Pharmsteri™ PTFE Cartridge Filter

*PSTT series filters provide safe, sterile filtration for pharmaceutical and food and beverage applications*

PSTT series PTFE cartridge filters join our portfolio of filtration solutions that help ensure reliable product processing. Constructed of polypropylene components and a hydrophobic polytetrafluoroethylene (PTFE) membrane, Pharmsteri™ cartridge filters are economical and efficient for use in various air and gas, pharmaceutical and food and beverage applications.

Our portfolio of Pharmsteri™ PTFE filters is 100% tested during manufacturing to ensuring high quality for sterility assurance. Various fitting sizes and types are available to provide design flexibility and versatility in a broad range of applications.

## APPLICATIONS

- Sterile filtration for air and gas
- Vent filtration

## FEATURES & BENEFITS

<b>All components meet USP &lt;88&gt; Class VI Plastics Test</b>	Fits most stainless-steel housings, providing design flexibility and versatility in a broad range of applications
<b>Sterilizing-grade materials meet Bacterial Challenge Test ASTM F838</b>	Provides safe, sterile filtration for air and gas applications
<b>100% integrity tested before release</b>	Provides high quality for sterility assurance




*Air and gas filters.*

## SPECIFICATIONS


<b>Retention rating</b>	0.22 µm	
<b>Materials</b>	Media	Polytetrafluoroethylene (PTFE)
	Support	Polypropylene
	Sleeve, core, top, and end caps	Polypropylene
	O-ring	Silicone
<b>Sealing technology</b>	Thermal bonding without adhesives	
<b>Filtration area</b>	≥0.58 m <sup>2</sup> @ 10", ≥0.28 m <sup>2</sup> @ 5"	
<b>Integrity test</b>	Minimum bubble point at 60% isopropanol water, 25°C (77°F)	≥1155 mbar
	Minimum bubble point at 95% ethanol water, 25°C (77°F)	≥1100 mbar
	Water intrusion at 2620 mbar @ 25°C (77°F)	≤1.0 mL/min @ 5"
		≤1.4 mL/min @ 10"
<b>Maximum operating conditions</b>	Maximum forward differential pressure	4.2 bar @ 25°C (77°F), 2.0 bar @ 80°C (176°F)
<b>Sterilization cycles</b>	Maintained integrity after 25 cycles of steam-in-place (SIP) sterilization (forward and reverse) or autoclave, 30 min at 127°C (261°F)	
<b>Endotoxin releasing</b>	<0.25 EU/mL according to the test methodology in USP	
<b>TOC</b>	<0.5 mg/L after a water flush of 5 L/10" cartridge	
<b>Conductivity</b>	≤1.3 µS/cm after water flush of 5 L/10" cartridge	
<b>Particle release</b>	Meets the requirements of WFI set by USP	
<b>Non-fiber releasing</b>	Meets the criteria for a non-fiber releasing filter defined in 21 CFR 210.3(b)(6)	
<b>NVR</b>	After autoclaving and 24-hours in 50% ethanol water with vibration (contact Entegris for details)	
<b>Material toxicity</b>	All components meet the requirements of the USP <88> Reactivity Test for Class VI Plastics	
	Filters meet the requirements of USP <87> Biological Reactivity Tests In Vitro Cytotoxicity	
<b>Bacterial challenge test</b>	Passed the bacterial challenge test using <i>Brevundimonas diminuta</i> (ATCC 19146) at a minimum challenge concentration 1x10 <sup>7</sup> CFU/cm <sup>2</sup> (0.22 µm) per ASTM F838	
<b>Indirect food additive</b>	Meets the FDA Indirect Food Additive requirements cited in 21 CFR 177-182	
<b>Food contact material</b>	(EU) No. 1935/2004, (EU) No. 10/2011	
<b>Quality</b>	Manufactured in accordance with ISO 9001 and ISO 13485 certified quality management system	

## PERFORMANCE DATA

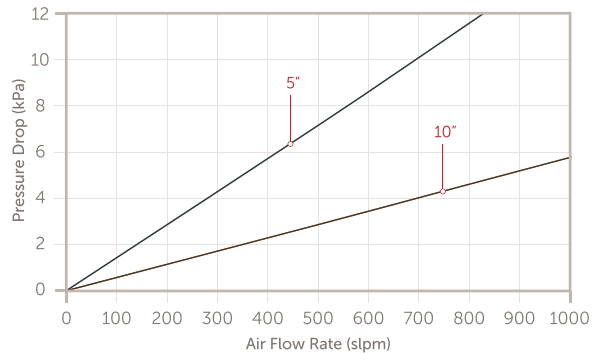


## DIMENSIONS

Code 6

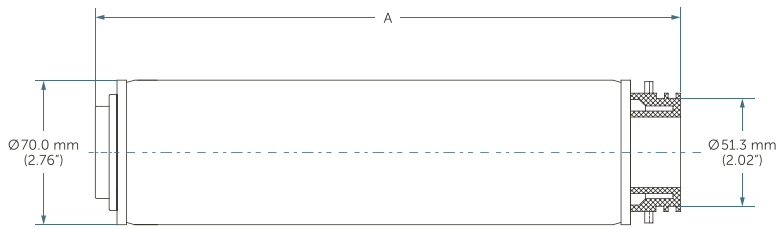

Length	Code 6 (A)
5"	150.5 mm (5.9")
10"	276.0 mm (10.9")
20"	520.0 mm (20.5")
30"	764.5 mm (30.1")

Code 7

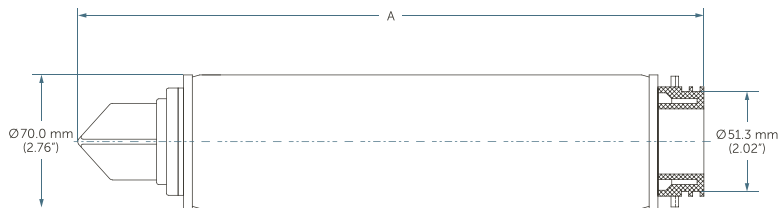

Length	Code 7 (A)
5"	—
10"	316.5 mm (12.5")
20"	561.0 mm (22.1")
30"	805.5 mm (31.7")

## ORDERING INFORMATION

PART NUMBER	CONNECTION	LENGTH	O-RING	RETENTION RATING
PSTT022605S1	Code 6	5"	Silicone	0.22 µm
PSTT022610S1	Code 6	10"	Silicone	0.22 µm
PSTT022620S1	Code 6	20"	Silicone	0.22 µm
PSTT022630S1	Code 6	30"	Silicone	0.22 µm
PSTT022710S1	Code 7	10"	Silicone	0.22 µm
PSTT022720S1	Code 7	20"	Silicone	0.22 µm
PSTT022730S1	Code 7	30"	Silicone	0.22 µm

### FOR MORE INFORMATION

Please call your Regional Customer Service Center today to learn what Entegris can do for you. Visit [entegris.com](http://entegris.com) and select the [Contact Us](#) link to find the customer service center nearest you.

### TERMS AND CONDITIONS OF SALE

All purchases are subject to Entegris' Terms and Conditions of Sale. To view and print this information, visit [entegris.com](http://entegris.com) and select the [Terms & Conditions](#) link in the footer.



Corporate Headquarters  
129 Concord  
Billerica, MA 01821  
USA

Customer Service  
Tel +1 952 556 4181  
Fax +1 952 556 8022  
Toll Free 800 394 4083

Entegris®, the Entegris Rings Design®, and other product names are trademarks of Entegris, Inc. as listed on [entegris.com/trademarks](http://entegris.com/trademarks). All third-party product names, logos, and company names are trademarks or registered trademarks of their respective owners. Use of them does not imply any affiliation, sponsorship, or endorsement by the trademark owner.

©2022 Entegris, Inc. | All rights reserved. | Printed in the USA | 9000-12520DSA-0822